


CO / CO₂ / C_nH_m / N₂O / SF₆

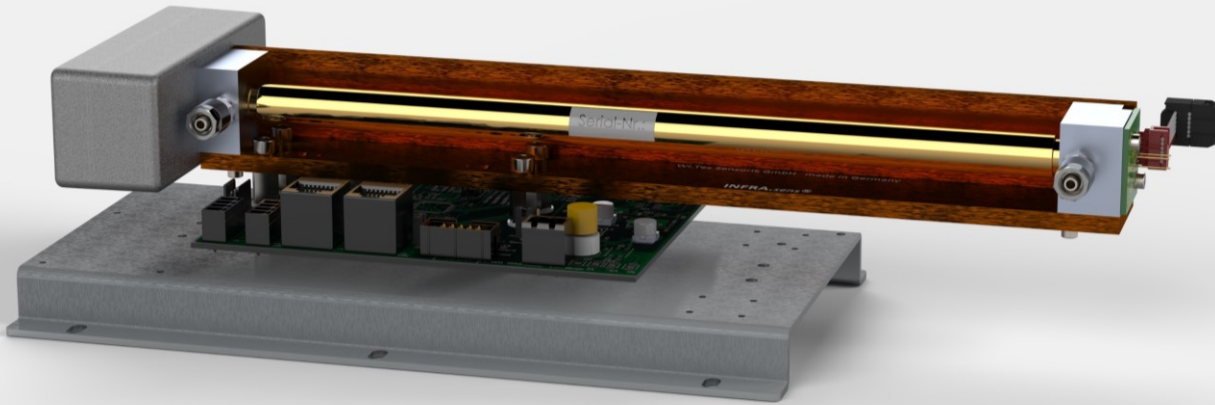

INFRA.sens® AK20G

Applications

- > TOC water analysis
- > Elemental analysis
- > Environmental monitoring
- > Process control
- > Automotive
- > Leakage detection


Options

- > O2.sens (Oxygen sensor)
- > P.sens (Pressure sensor)
- > HUMI.sens® (Humidity sensor)
- > Analogboard (0-10V)
- > Thermobox

Features & Benefits

- > high dynamic range
- > low power consumption <2W @ 24V
- > different interfaces (RS232, CANbus)
- > low drift
- > MARS-Tool (Wi.Tec Software)

Dimensions

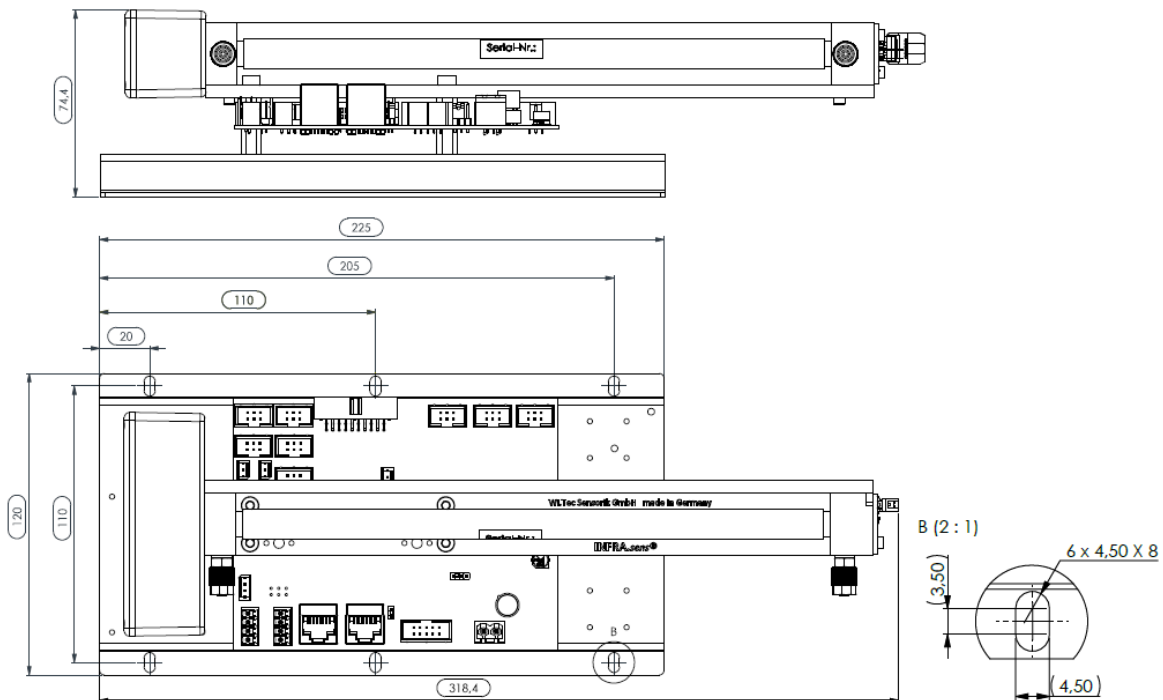

For more and most recent information please have a look on our website at www.witec-sensorik.de/en/

INFRA.sens® AK250G

CO / CO₂ / C_nH_m / N₂O / SF₆

	gas channel 1*	gas channel 2*	gas channel 3*	Option**		
Single Gas Module	CO / CO ₂ / C _n H _m / CH ₄ / N ₂ O / SF ₆			O ₂	P	H
Dual Gas Module	CO		CO ₂ / C _n H _m / CH ₄ / N ₂ O / SF ₆	O ₂	P	H
		CO ₂	CO ₂ / C _n H _m / CH ₄ / N ₂ O / SF ₆	O ₂	P	H
Triple Gas Module	CO	CO ₂	CO ₂ / C _n H _m / CH ₄ / N ₂ O / SF ₆	O ₂	P	H

* one gas per column selectable

** P = pressure sensor, H = humidity sensor

List of measurement ranges

Measurement range*	CO ₂	CO	N ₂ O	CH ₄	C _n H _m	CF ₄	SF ₆	H ₂ O
100Vol.%								
50Vol.%								
30Vol.%								
20Vol.%	✓							
10Vol.%	✓							
5Vol.%	✓							
1Vol.%	✓			✓	✓			
5000ppm	✓	✓		✓	✓			
2000ppm	✓	✓	✓	✓	✓			
1000ppm	✓	✓	✓	✓	✓			
500ppm	✓	✓**	✓					
300ppm	✓		✓					
100ppm	✓		✓				✓	
50ppm	✓						✓	
10ppm								

* Full scale value (F.S.)

** We recommend the usage of our TBH on request

For other measuring ranges please refer to our further datasheets



THE GAS MEASUREMENT COMPANY

!CAUSE IT MAKES .SENS

Subject to change without notice. // 2021-06 Rev.03

INFRA.sens® AK250G

CO / CO₂ / C_nH_m / N₂O / SF₆

General features	
Measurement principle	Non-dispersive infrared (NDIR); dual beam; dual to quad wavelengths
Measurement range	see list of measurement ranges
Gas flow	0.1 – 1.5 l/min
Dimensions	319mm x 120mm x 75mm
Weight	approx. 720g
Tube connector	4/6mm tube
Lifetime of IR radiation source	> 40 000h
Measuring response ¹	
Warm-up time	1 min (initial), <15 min ²
Response time(t ₉₀)	1.5s – 15s ³
Detection limit (3·σ)	< 0,5% F.S. ⁴
Linearity error	< ± 1% F.S.
Repeatability	< ± 0.3% of reading
Long term stability (zero)	< ± 2% F.S./week
Long term stability (span)	< ± 2% F.S./month
Temp. Influence zero	< 1% F.S./10K
Temp. Influence span	< 1% F.S./10K ⁵
Cross sensitivity	< 2% F.S. ⁶
Pressure influence	< 1.5%/10hPa of reading ⁷
Electrical inputs and outputs	
Supply voltage	24 (15 – 30) VDC
Supply current (peak)	< 0.1A
Average power consumption	< 2W
Digital output signal	RS 232 (ASCII) or CANbus
Climatic conditions	
Operating temperature	5 – 45 °C ⁸
Storage temperature	-20 – 60 °C
Air pressure	600 – 1200 hPa (mbar)
Ambient humidity	0 – 95% rel. humidity (not condensing)

F.S. full scale ¹ related to P_a = 1020hPa ; T_a = 25°C ; flow = 1l/min ² full specification, demands to environmental conditions ³ depends on digital filter settings ⁴ at zero point ⁵ with span temperature compensation ⁶ to each calibrated gas channel, other gases on request ⁷ without pressure compensation ⁸ stable climatic conditions recommended, please check dewpoint considerations



THE GAS MEASUREMENT COMPANY

!CAUSE IT MAKES .SENS

Subject to change without notice. // 2021-06 Rev.03